



# Neo-Dyn® Series 184P Vacuum Switch

Sensitive, compact, factory set/tamper proof vacuum switch. Has efficient Nega-Rate® Belleville disc spring sensing mechanism.

Operating Pressure Data			
Fixed Set Point Range		Maximum Recommended	
Increasing	Decreasing	System Pressure	Proof Pressure
6" H <sub>2</sub> O to 60" H <sub>2</sub> O	3" H <sub>2</sub> O to 55" H <sub>2</sub> O	100	150

All values given in psig

# **Standard Specifications**

### **Deadband (Differential)**

The deadband can be selected anywhere from 3" H<sub>2</sub>O or 8% (whichever is greater) to 45% of the set point.

### **Electrical**

Snap action electrical switch listed by Underwriters' Laboratories, Inc. and CSA

### **Electrical Connection**

1/2" - 14 NPT male conduit connection with PVC insulated 18 AWG leads 18" long

### **Pressure Connection**

1/4" - 18 NPT Female

### **Temperature Range**

Ambient: -30°F to +160°F

 $(-34^{\circ}C \text{ to } + 71^{\circ}C)$ 

Media:  $-30^{\circ}$ F to  $+160^{\circ}$ F

 $(-34^{\circ}C \text{ to } +71^{\circ}C)$ 

### **Shipping Weight**

Approximately 16 ounces

# **Ordering Sequence** — Select desired option for each category

### **OPTIONS**

### **Wetted Material**

1 Aluminum and stainless steel, Teflon coated polyimide diaphragm, Buna-N O-Ring

### **Electrical Form**

C 5 amps and 125 or 250 VAC; 5 amps resistive, 3 amps inductive 28 VDC

CC 5 amps and 125 or 250 VAC; 5 amps resistive, 3 amps inductive 28 VDC

### **Enclosure**

3 Meets or exceeds the requirements of NEMA Type 3, 3R, 3S, 4, 4X and 13 Note: For dry air or inert gas media only

### Miscellaneous

A Epoxy paint exterior — extra protection for severe environments

B Viton O-Ring

C EPR O-Ring

M Gold electrical contacts for extremely low current applications

R 72" Electrical free leads


### Special (Consult representative or factory)

- Pressure port per MS33649-04
- Electrical connection per MS33678-10SL-3P
- Non-catalog set point, deadband and/or proof pressure
- Operating temperature capability from -65°F to +350°F


# Weather Proof (NEMA 4 and 13)

## **Ordering Procedure**

- Specify set point, increasing or decreasing
- Specify deadband if pertinent and if not, specify as 'open'
- Specify system pressure
- Specify proof pressure
- Specify media
- Insert available option number or letter designation as required

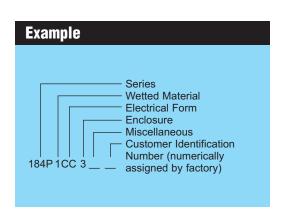

# **Envelope Dimensions**

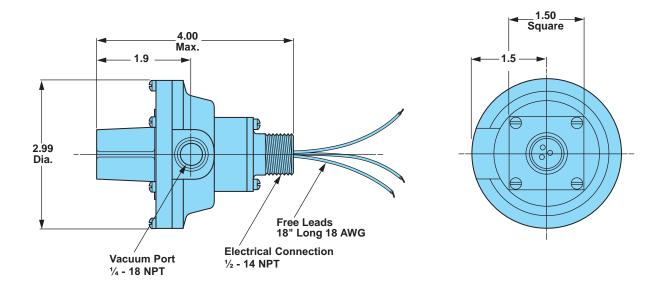

# **Electrical Form**



# **Basic Principles of Design**

